



# FLOOD LIGHT




MODEL NO :- EL-FL1-XXW

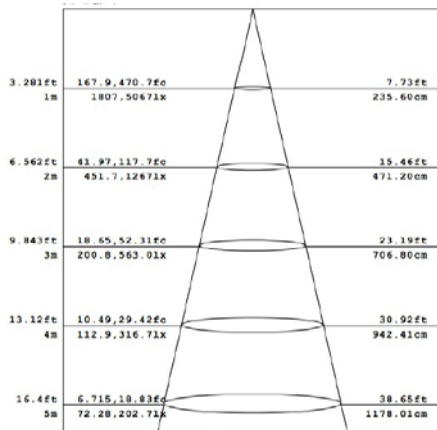

DESCRIPTION	SPECIFICATIONS
LED Make	Osram
LED Type	SMD, High Power
Power	40W-120W
Input	90-285VAC,50Hz
Color Temperature	2700K-6500K
Working Temp.	-20 to +50 C
Power Factor	>.95
Driver Efficiency	> 85%
Lumen Efficiency	110 Lumen/Watt
Luminaries Material	Aluminium Die Casting
Ingress Protection	IP67
Working Life	> 50,000 Hours
LED Operating Current	600-650mA
CRI	>80
Overload Protection	95-110%, 4KV Surge Protection
Distribution	60Deg-150Deg
Certificates	LM80,L70
Application	Factories, Stadiums, Compounds, Housing Soc.

# FLOOD LIGHT




MODEL NO :- EL-FL2-XXW

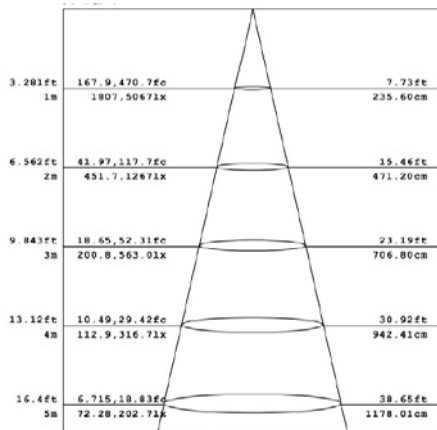

DESCRIPTION	SPECIFICATIONS
COB Make	Citizen
LED Type	COB, High Power
Power	40W-120W
Input	90-285VAC,50Hz
Color Temperature	2700K-6500K
Working Temp.	-20 to +50 C
Power Factor	>.95
Driver Efficiency	> 85%
Lumen Efficiency	110 Lumen/Watt
Luminaries Material	Aluminium Die Casting
Ingress Protection	IP67
Working Life	> 50,000 Hours
Cob Operating Current	300ma-2A
CRI	>80
Overload Protection	95-110%, 4KV Surge Protection
Distribution	60Deg-150Deg
Certificates	LM80,L70
Application	Factories, Stadiums, Compounds, Housing Soc.

# FLOOD LIGHT



MODEL NO :- EL-FL3-XXW

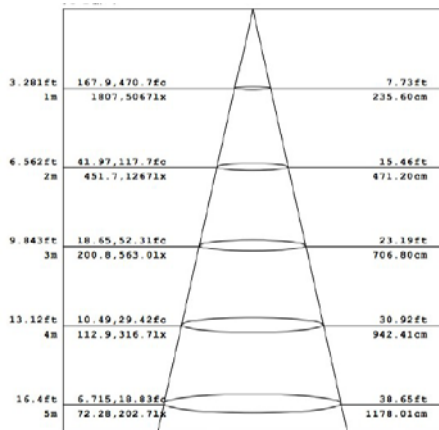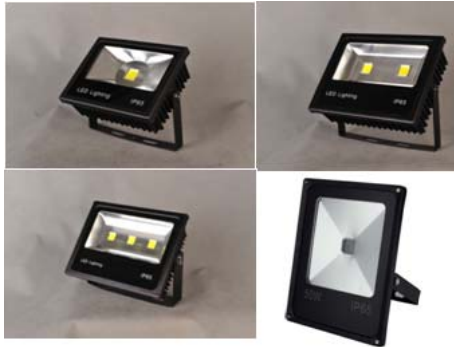

DESCRIPTION	SPECIFICATIONS
<b>COB Make</b>	Citizen
<b>LED Type</b>	COB, High Power
<b>Power</b>	10W-200W
<b>Input</b>	90-285VAC,50Hz
<b>Color Temperature</b>	2700K-6500K
<b>Working Temp.</b>	-20 to +50 C
<b>Power Factor</b>	>.95
<b>Driver Efficiency</b>	> 85%
<b>Lumen Efficiency</b>	110 Lumen/Watt
<b>Luminaries Material</b>	Aluminium Die Casting
<b>Ingress Protection</b>	IP67
<b>Working Life</b>	> 50,000 Hours
<b>Cob Operating Current</b>	300ma-3A
<b>CRI</b>	>80
<b>Overload Protection</b>	95-110%, 4KV Surge Protection
<b>Distribution</b>	60Deg-150Deg
<b>Certificates</b>	LM80,L70
<b>Application</b>	Factories, Stadiums, Compounds, Housing Soc.

# FLOOD LIGHT

MODEL NO :- EL-FL4-XXW

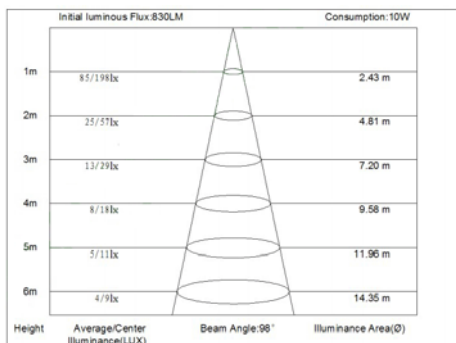

DESCRIPTION	SPECIFICATIONS
<b>LED Make</b>	Epistar
<b>LED Type</b>	SMD, High Power
<b>Power</b>	40W-120W
<b>Input</b>	90-285VAC,50Hz
<b>Color Temperature</b>	2700K-6500K
<b>Working Temp.</b>	-20 to +50 C
<b>Power Factor</b>	>.95
<b>Driver Efficiency</b>	> 85%
<b>Lumen Efficiency</b>	90 Lumen/Watt
<b>Luminaries Material</b>	Aluminium Die Casting
<b>Ingress Protection</b>	IP67
<b>Working Life</b>	> 50,000 Hours
<b>LED Operating Current</b>	600-650mA
<b>CRI</b>	>80
<b>Overload Protection</b>	95-110%, 4KV Surge Protection
<b>Distribution</b>	60Deg-150Deg
<b>Certificates</b>	LM80,L70
<b>Application</b>	Factories, Stadiums, Compounds, Housing Soc.