



# PANEL LIGHT

MODEL NO :- EL-PL1-XXW-SQ

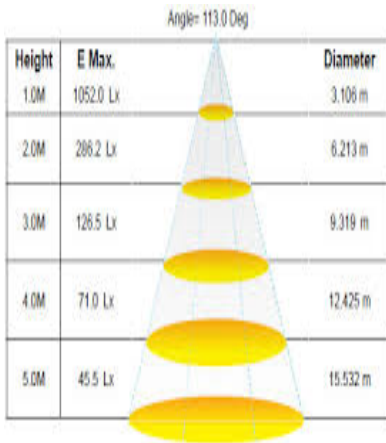


DESCRIPTION	SPECIFICATIONS
LED Make	Osram/Samsung
LED Type	SMD, Low Power
Power	8W/12W/15W/18W/22W
Input	90-285VAC,50Hz
Color Temperature	2700K-6500K
Working Temp.	-20 to +50 C
Power Factor	>.95
Driver Efficiency	> 85%
Lumen Efficiency	100 Lumen/Watt
Luminaries Material	Aluminium Die Casting
Ingress Protection	IP40
Working Life	> 50,000 Hours
LED Operating Current	55-60mA
CRI	>80
Overload Protection	95-110%
Distribution	Diffused
Certificates	LM80,L70
Application	Residential, Office, Lobby

LUMINOUS INTENSITY DISTRIBUTION




LUMINOUS INTENSITY DISTRIBUTION

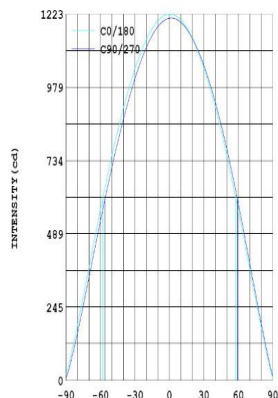


# PANEL LIGHT

MODEL NO :- EL-PL1-XXW-RO

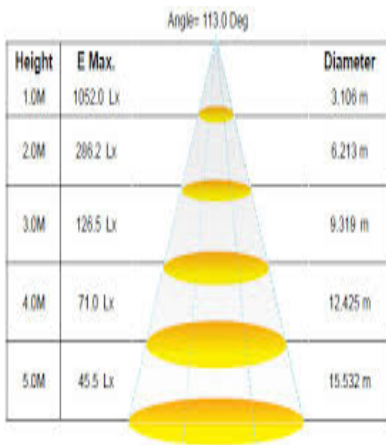


DESCRIPTION	SPECIFICATIONS
LED Make	Osram/Samsung
LED Type	SMD, Low Power
Power	8W/12W/15W/18W/22W
Input	90-285VAC,50Hz
Color Temperature	2700K-6500K
Working Temp.	-20 to +50 C
Power Factor	>.95
Driver Efficiency	> 85%
Lumen Efficiency	100 Lumen/Watt
Luminaries Material	Aluminium Die Casting
Ingress Protection	IP40
Working Life	> 50,000 Hours
LED Operating Current	55-60mA
CRI	>80
Overload Protection	95-110%
Distribution	Diffused
Certificates	LM80,L70
Application	Residential, Office, Lobby

LUMINOUS INTENSITY DISTRIBUTION





LUMINOUS INTENSITY DISTRIBUTION

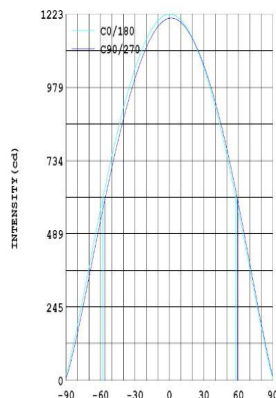

# TUBE LIGHT


MODEL NO :- EL-TL1-XXW-T8

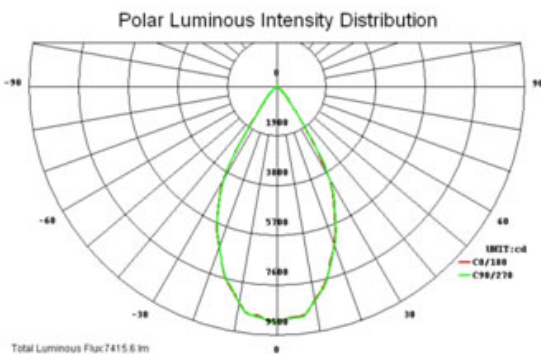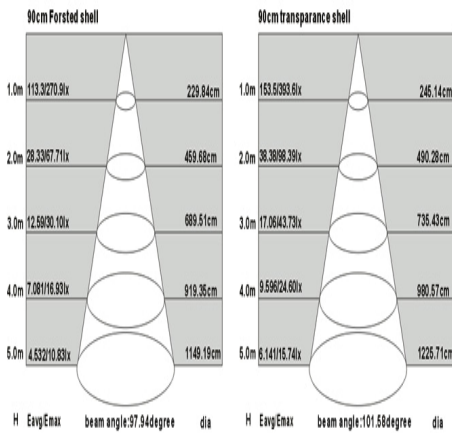

DESCRIPTION	SPECIFICATIONS
<b>LED Make</b>	Osram/Samsung/Nichia
<b>LED Type</b>	SMD, Low Power
<b>Power</b>	9W/11W/18W/20W/22W
<b>Input</b>	90-285VAC,50Hz
<b>Color Temperature</b>	2700K-6500K
<b>Working Temp.</b>	-20 to +50 C
<b>Power Factor</b>	>.95
<b>Driver Efficiency</b>	> 85%
<b>Lumen Efficiency</b>	100 Lumen/Watt
<b>Luminaries Material</b>	Aluminium Die Casting
<b>Ingress Protection</b>	IP40
<b>Working Life</b>	> 50,000 Hours
<b>LED Operating Current</b>	25-30mA
<b>CRI</b>	>80
<b>Overload Protection</b>	95-110%
<b>Distribution</b>	Diffused
<b>Certificates</b>	LM80,L70
<b>Application</b>	Lobby,Parking, Housing Society


# MR16 SPOT LIGHT

MODEL NO :- EL-MR16-XXW

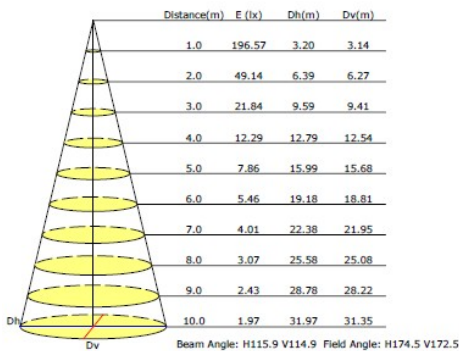



DESCRIPTION	SPECIFICATIONS
LED Make	Osram/Samsung
LED Type	SMD, Low Power
Power	3W/4W/5W/6W/9W
Input	90-285VAC,50Hz
Color Temperature	2700K-6500K
Working Temp.	-20 to +50 C
Power Factor	>.95
Driver Efficiency	> 85%
Lumen Efficiency	100 Lumen/Watt
Luminaries Material	Aluminium Die Casting
Ingress Protection	IP40
Working Life	> 50,000 Hours
LED Operating Current	55-60mA
CRI	>80
Overload Protection	95-110%
Distribution	20 Deg-60Deg
Certificates	LM80,L70
Application	Shops, Showroom, Commercial

[Polar distribution]

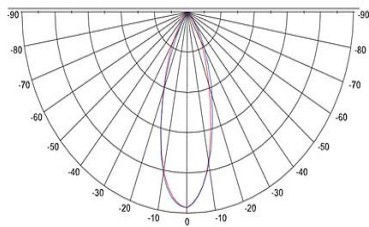

# LED BULB

MODEL NO :- EL-BL1-XXW

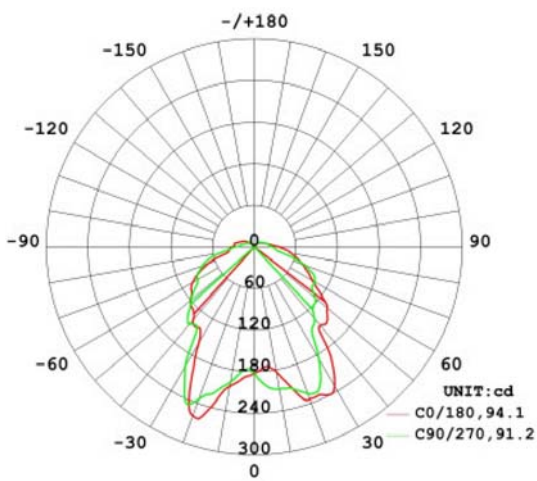
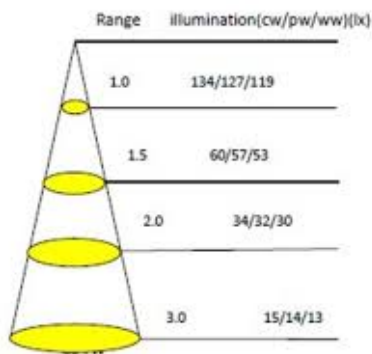


DESCRIPTION	SPECIFICATIONS
LED Make	Osram/Samsung
LED Type	SMD, Low Power
Power	5W/6W/7W/8W
Input	90-285VAC,50Hz
Color Temperature	2700K-6500K
Working Temp.	-20 to +50 C
Power Factor	>.95
Driver Efficiency	> 85%
Lumen Efficiency	90 Lumen/Watt
Luminaries Material	Aluminium Die Casting
Ingress Protection	IP40
Working Life	> 50,000 Hours
LED Operating Current	55-60mA
CRI	>80
Overload Protection	95-110%
Distribution	Diffused/Clear
Certificates	LM80,L70
Application	Shops, Residential, Commercial



# LED CANDLE BULB

MODEL NO :- EL-CL1-XXW

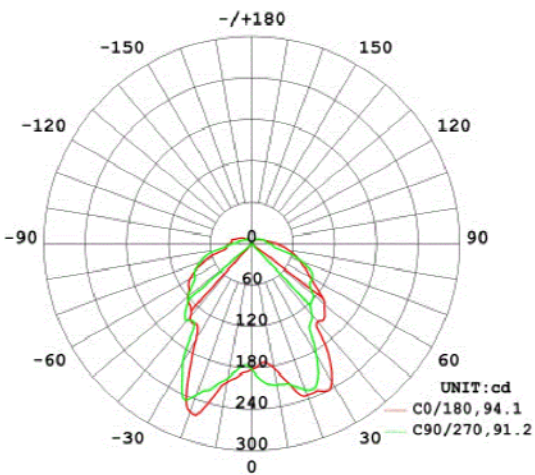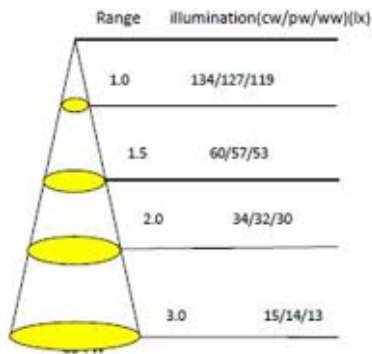



## DESCRIPTION

## SPECIFICATIONS

<b>LED Make</b>	Osram/Samsung
<b>LED Type</b>	SMD, Low Power
<b>Power</b>	3W/4W/5W
<b>Input</b>	90-285VAC,50Hz
<b>Color Temperature</b>	2700K-6500K
<b>Working Temp.</b>	-20 to +50 C
<b>Power Factor</b>	>.95
<b>Driver Efficiency</b>	> 85%
<b>Lumen Efficiency</b>	90 Lumen/Watt
<b>Luminaries Material</b>	Aluminium Die Casting
<b>Ingress Protection</b>	IP40
<b>Working Life</b>	> 50,000 Hours
<b>LED Operating Current</b>	55-60mA
<b>CRI</b>	>80
<b>Overload Protection</b>	95-110%
<b>Distribution</b>	Diffused/Clear
<b>Certificates</b>	LM80,L70
<b>Application</b>	Shops, Residential, Chandeliers

# TUBE LIGHT


MODEL NO :- EL-TL1-XXW-T5

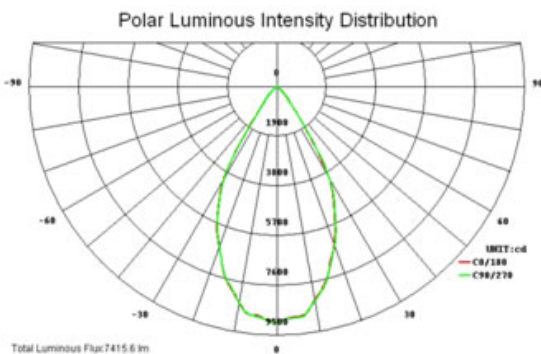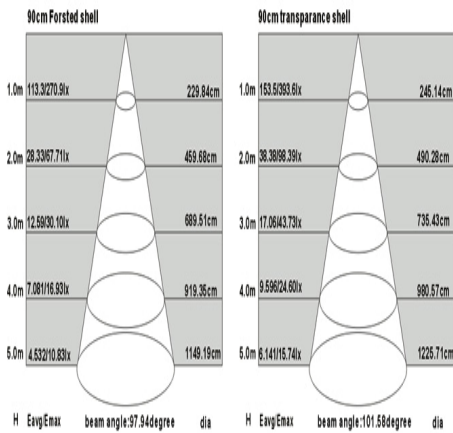


DESCRIPTION	SPECIFICATIONS
<b>LED Make</b>	Osram/Samsung/Nichia
<b>LED Type</b>	SMD, Low Power
<b>Power</b>	9W/11W/18W/20W/22W
<b>Input</b>	90-285VAC,50Hz
<b>Color Temperature</b>	2700K-6500K
<b>Working Temp.</b>	-20 to +50 C
<b>Power Factor</b>	>.95
<b>Driver Efficiency</b>	> 85%
<b>Lumen Efficiency</b>	100 Lumen/Watt
<b>Luminaries Material</b>	Aluminium Die Casting
<b>Ingress Protection</b>	IP40
<b>Working Life</b>	> 50,000 Hours
<b>LED Operating Current</b>	25-30mA
<b>CRI</b>	>80
<b>Overload Protection</b>	95-110%
<b>Distribution</b>	Diffused
<b>Certificates</b>	LM80,L70
<b>Application</b>	Lobby,Parking, Housing Society

# LED FLAT PANEL


MODEL NO :- EL-FPL1-XXW

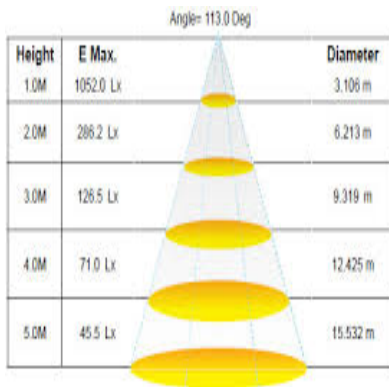

LUMINOUS INTENSITY DISTRIBUTION



LUMINOUS INTENSITY DISTRIBUTION



## DESCRIPTION


## SPECIFICATIONS

<b>LED Make</b>	Osram/Samsung
<b>LED Type</b>	SMD, Low Power
<b>Power</b>	28W/36W/48W
<b>Input</b>	90-285VAC,50Hz
<b>Color Temperature</b>	2700K-6500K
<b>Working Temp.</b>	-20 to +50 C
<b>Power Factor</b>	>.95
<b>Driver Efficiency</b>	> 85%
<b>Lumen Efficiency</b>	100 Lumen/Watt
<b>Luminaries Material</b>	Aluminium Die Casting
<b>Ingress Protection</b>	IP40
<b>Working Life</b>	> 50,000 Hours
<b>LED Operating Current</b>	25-30mA
<b>CRI</b>	>80
<b>Overload Protection</b>	95-110%
<b>Distribution</b>	Diffused
<b>Certificates</b>	LM80,L70
<b>Application</b>	Office, Residential, Commercial




# SURFACE LIGHT

MODEL NO :- EL-SR1-XXW

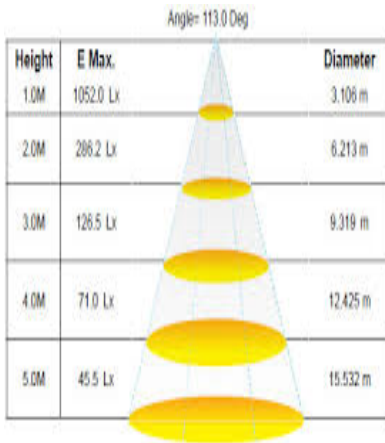


DESCRIPTION	SPECIFICATIONS
<b>LED Make</b>	Osram/Samsung
<b>LED Type</b>	SMD, Low Power
<b>Power</b>	8W/12W/15W/18W/22W
<b>Input</b>	90-285VAC,50Hz
<b>Color Temperature</b>	2700K-6500K
<b>Working Temp.</b>	-20 to +50 C
<b>Power Factor</b>	>.95
<b>Driver Efficiency</b>	> 85%
<b>Lumen Efficiency</b>	100 Lumen/Watt
<b>Luminaries Material</b>	Aluminium Die Casting
<b>Ingress Protection</b>	IP40
<b>Working Life</b>	> 50,000 Hours
<b>LED Operating Current</b>	55-60mA
<b>CRI</b>	>80
<b>Overload Protection</b>	95-110%
<b>Distribution</b>	Diffused
<b>Certificates</b>	LM80,L70
<b>Application</b>	Residential, Office, Lobby

LUMINOUS INTENSITY DISTRIBUTION



LUMINOUS INTENSITY DISTRIBUTION

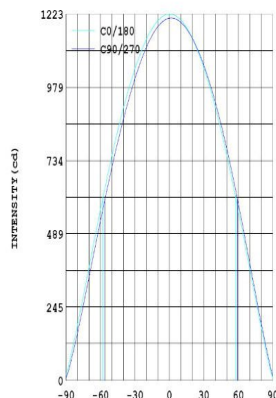

# MIRROR LIGHT

MODEL NO :- EL-ML1-XXW



DESCRIPTION	SPECIFICATIONS
LED Make	Osram/Samsung
LED Type	SMD, Low Power
Power	8W/12W/15W
Input	90-285VAC,50Hz
Color Temperature	2700K-6500K
Working Temp.	-20 to +50 C
Power Factor	>.95
Driver Efficiency	> 85%
Lumen Efficiency	90 Lumen/Watt
Luminaries Material	Aluminium Die Casting
Ingress Protection	IP40
Working Life	> 50,000 Hours
LED Operating Current	55-60mA
CRI	>80
Overload Protection	95-110%
Distribution	Diffused
Certificates	LM80,L70
Application	Bathrooms/Photo Frames

# DESIGNER LIGHT


MODEL NO :- EL-DL1/DL2-XXW



DESCRIPTION	SPECIFICATIONS
LED Make	Osram/Samsung
LED Type	SMD, Low Power
Power	8W/12W/15W
Input	90-285VAC,50Hz
Color Temperature	2700K-6500K
Working Temp.	-20 to +50 C
Power Factor	>.95
Driver Efficiency	> 85%
Lumen Efficiency	90 Lumen/Watt
Luminaries Material	Aluminium Die Casting
Ingress Protection	IP40
Working Life	> 50,000 Hours
LED Operating Current	55-60mA
CRI	>80
Overload Protection	95-110%
Distribution	Diffused
Certificates	LM80,L70
Application	Residential/Commercial

# STRIP LIGHT

MODEL NO :- EL-STRIP-XXX



DESCRIPTION	SPECIFICATIONS
LED Make	Edison
LED Type	SMD, Low Power
Power	6W/RMT
Input	90-285VAC,50Hz
Color Temperature	2700K-6500K,RGB
Working Temp.	-20 to +50 C
Power Factor	>.95
Driver Efficiency	> 85%
Lumen Efficiency	70-80 Lumen/Watt
Luminaries Material	Aluminium Die Casting
Ingress Protection	IP20/IP40
Working Life	> 50,000 Hours
LED Operating Current	55-60mA
CRI	>80
Overload Protection	95-110%
Distribution	120Deg
Certificates	LM80,L70
Application	Residential, Office, Lobby