
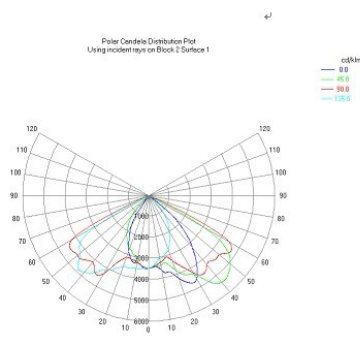


STREET LIGHT



MODEL NO :- EL-SL1-XXW

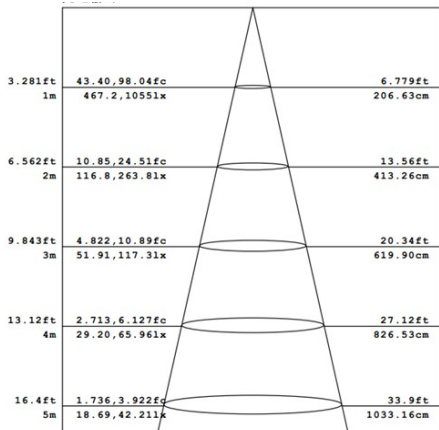

DESCRIPTION	SPECIFICATIONS
LED Make	Osram
LED Type	SMD, High Power
Power	40W-150W
Input	90-285VAC,50Hz
Color Temperature	2700K-6500K
Working Temp.	-20 to +50 C
Power Factor	>.95
Driver Efficiency	> 85%
Lumen Efficiency	110 Lumen/Watt
Luminaries Material	Aluminium Die Casting
Ingress Protection	IP67
Working Life	> 50,000 Hours
LED Operating Current	600-650mA
CRI	>80
Overload Protection	95-110%, 4KV Surge Protection
Distribution	60Deg-150Deg
Certificates	LM80,L70
Application	Streets, Stadiums, Compounds, Housing Soc.

STREET LIGHT



MODEL NO :- EL-SL2-XXW

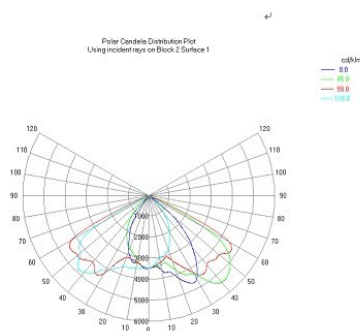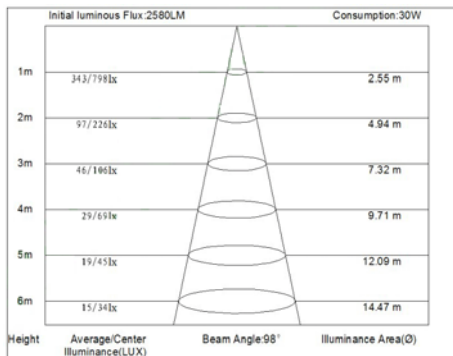

DESCRIPTION	SPECIFICATIONS
LED Make	Osram
LED Type	SMD, High Power
Power	10W-200W
Input	90-285VAC,50Hz
Color Temperature	2700K-6500K
Working Temp.	-20 to +50 C
Power Factor	>.95
Driver Efficiency	> 85%
Lumen Efficiency	110 Lumen/Watt
Luminaries Material	Aluminium Die Casting
Ingress Protection	IP67
Working Life	> 50,000 Hours
LED Operating Current	600-650mA
CRI	>80
Overload Protection	95-110%, 4KV Surge Protection
Distribution	60Deg-150Deg
Certificates	LM80,L70
Application	Streets, Stadiums, Compounds, Housing Soc.

STREET LIGHT



MODEL NO :- EL-SL3-XXW

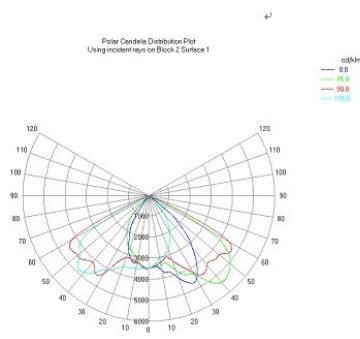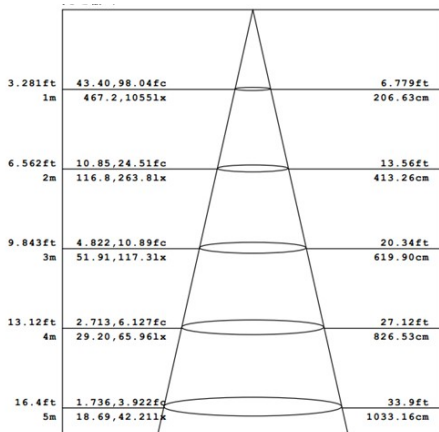

DESCRIPTION	SPECIFICATIONS
LED Make	Epistar
LED Type	SMD, High Power
Power	40W-150W
Input	90-285VAC,50Hz
Color Temperature	2700K-6500K
Working Temp.	-20 to +50 C
Power Factor	>.95
Driver Efficiency	> 85%
Lumen Efficiency	90 Lumen/Watt
Luminaries Material	Aluminium Die Casting
Ingress Protection	IP67
Working Life	> 50,000 Hours
LED Operating Current	600-650mA
CRI	>80
Overload Protection	95-110%, 4KV Surge Protection
Distribution	60Deg-150Deg
Certificates	LM80,L70
Application	Streets, Stadiums, Compounds, Housing Soc.

STREET LIGHT



MODEL NO :- EL-SL4-XXW

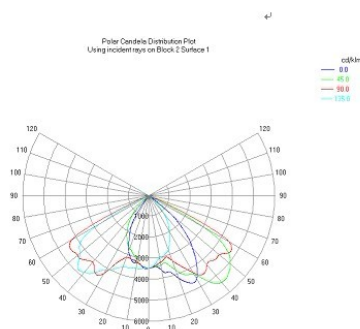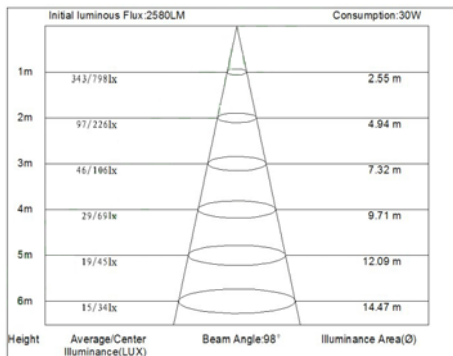

DESCRIPTION	SPECIFICATIONS
LED Make	Epistar
LED Type	SMD, High Power
Power	10W-200W
Input	90-285VAC,50Hz
Color Temperature	2700K-6500K
Working Temp.	-20 to +50 C
Power Factor	>.95
Driver Efficiency	> 85%
Lumen Efficiency	90 Lumen/Watt
Luminaries Material	Aluminium Die Casting
Ingress Protection	IP67
Working Life	> 50,000 Hours
LED Operating Current	600-650mA
CRI	>80
Overload Protection	95-110%, 4KV Surge Protection
Distribution	60Deg-150Deg
Certificates	LM80,L70
Application	Streets, Stadiums, Compounds, Housing Soc.

FLOOD LIGHT



MODEL NO :- EL-FL1-XXW

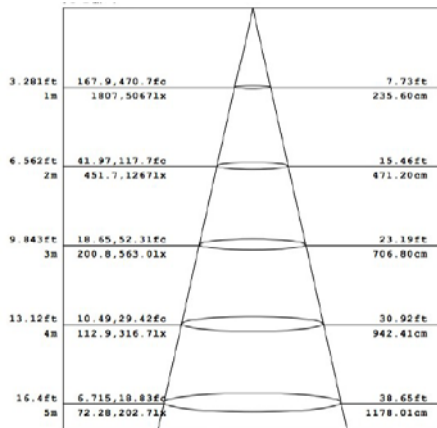

DESCRIPTION	SPECIFICATIONS
LED Make	Osram
LED Type	SMD, High Power
Power	40W-120W
Input	90-285VAC,50Hz
Color Temperature	2700K-6500K
Working Temp.	-20 to +50 C
Power Factor	>.95
Driver Efficiency	> 85%
Lumen Efficiency	110 Lumen/Watt
Luminaries Material	Aluminium Die Casting
Ingress Protection	IP67
Working Life	> 50,000 Hours
LED Operating Current	600-650mA
CRI	>80
Overload Protection	95-110%, 4KV Surge Protection
Distribution	60Deg-150Deg
Certificates	LM80,L70
Application	Factories, Stadiums, Compounds, Housing Soc.

FLOOD LIGHT




MODEL NO :- EL-FL2-XXW

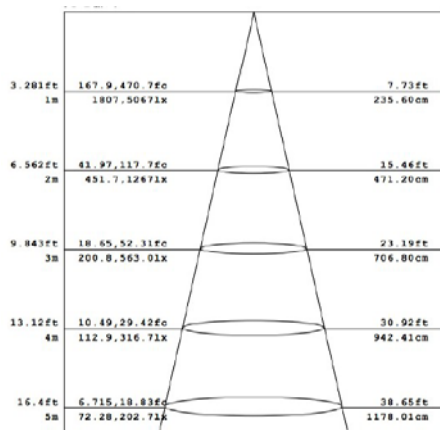

DESCRIPTION	SPECIFICATIONS
COB Make	Citizen
LED Type	COB, High Power
Power	40W-120W
Input	90-285VAC,50Hz
Color Temperature	2700K-6500K
Working Temp.	-20 to +50 C
Power Factor	>.95
Driver Efficiency	> 85%, Meanwell Driver
Lumen Efficiency	110 Lumen/Watt
Luminaries Material	Aluminium Die Casting
Ingress Protection	IP67
Working Life	> 50,000 Hours
Cob Operating Current	300ma-2A
CRI	>80
Overload Protection	95-110%, 4KV Surge Protection
Distribution	60Deg-150Deg
Certificates	LM80,L70
Application	Factories, Stadiums, Compounds, Housing Soc.

FLOOD LIGHT



MODEL NO :- EL-FL3-XXW

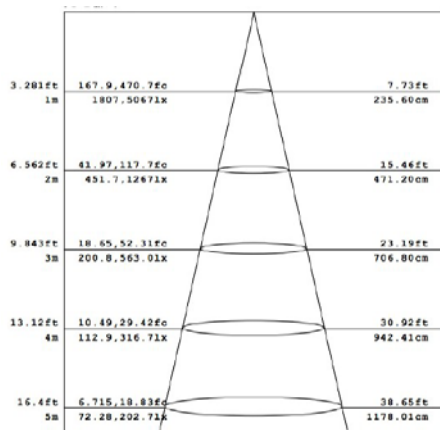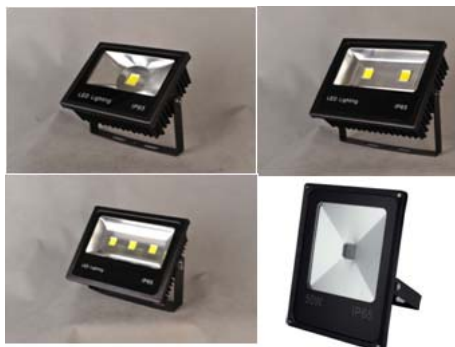

DESCRIPTION	SPECIFICATIONS
COB Make	Citizen
LED Type	COB, High Power
Power	10W-200W
Input	90-285VAC,50Hz
Color Temperature	2700K-6500K
Working Temp.	-20 to +50 C
Power Factor	>.95
Driver Efficiency	> 85%,MeanWell Driver
Lumen Efficiency	110 Lumen/Watt
Luminaries Material	Aluminium Die Casting
Ingress Protection	IP67
Working Life	> 50,000 Hours
Cob Operating Current	300ma-3A
CRI	>80
Overload Protection	95-110%, 4KV Surge Protection
Distribution	60Deg-150Deg
Certificates	LM80,L70
Application	Factories, Stadiums, Compounds, Housing Soc.

FLOOD LIGHT



MODEL NO :- EL-FL4-XXW

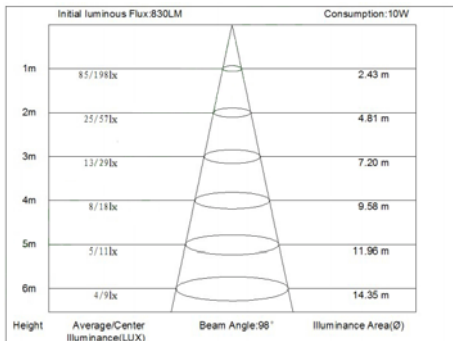

DESCRIPTION	SPECIFICATIONS
LED Make	Epistar
LED Type	SMD, High Power
Power	40W-120W
Input	90-285VAC,50Hz
Color Temperature	2700K-6500K
Working Temp.	-20 to +50 C
Power Factor	>.95
Driver Efficiency	> 85%
Lumen Efficiency	90 Lumen/Watt
Luminaries Material	Aluminium Die Casting
Ingress Protection	IP67
Working Life	> 50,000 Hours
LED Operating Current	600-650mA
CRI	>80
Overload Protection	95-110%, 4KV Surge Protection
Distribution	60Deg-150Deg
Certificates	LM80,L70
Application	Factories, Stadiums, Compounds, Housing Soc.

HIGH BAY



MODEL NO :- EL-HB1-XXW

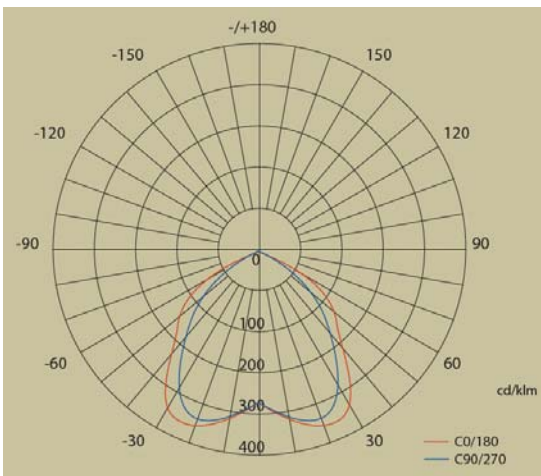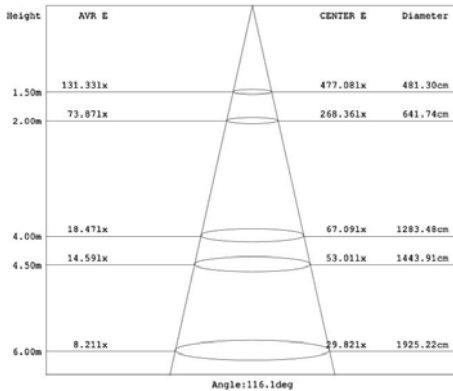

DESCRIPTION	SPECIFICATIONS
LED Make	Osram
LED Type	SMD, High Power
Power	40W-200W
Input	90-285VAC,50Hz
Color Temperature	2700K-6500K
Working Temp.	-20 to +50 C
Power Factor	>.95
Driver Efficiency	> 85%
Lumen Efficiency	110 Lumen/Watt
Luminaries Material	Aluminium Die Casting
Ingress Protection	IP67
Working Life	> 50,000 Hours
LED Operating Current	600-650mA
CRI	>80
Overload Protection	95-110%, 4KV Surge Protection
Distribution	60Deg-150Deg
Certificates	LM80,L70, LM79
Application	Factory, Warehouse, Airports, Railways.

HIGH BAY



MODEL NO :- EL-HB2-XXW

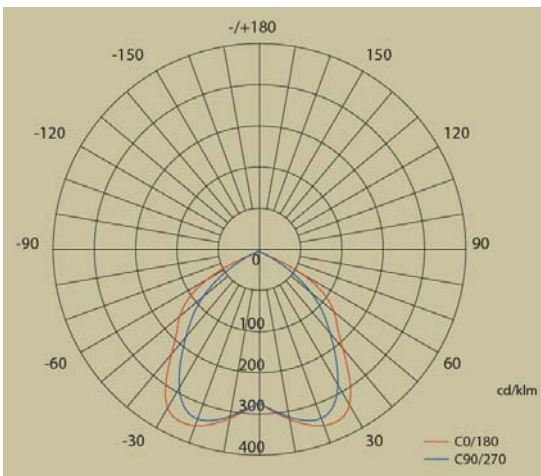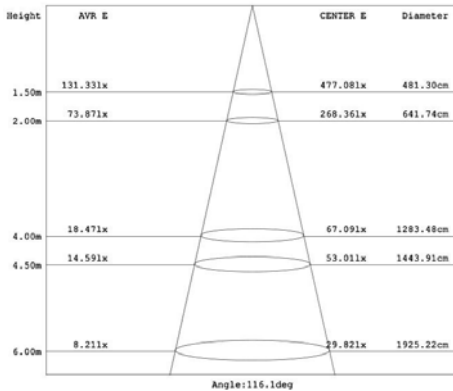

DESCRIPTION	SPECIFICATIONS
COB Make	Citizen
LED Type	COB, High Power
Power	40W-200W
Input	90-285VAC,50Hz
Color Temperature	2700K-6500K
Working Temp.	-20 to +50 C
Power Factor	>.95
Driver Efficiency	> 85%, Meanwell Driver
Lumen Efficiency	110 Lumen/Watt
Luminaries Material	Aluminium Die Casting
Ingress Protection	IP67
Working Life	> 50,000 Hours
Cob Operating Current	300mA-2A
CRI	>80
Overload Protection	95-110%, 4KV Surge Protection
Distribution	60Deg-150Deg
Certificates	LM80,L70, LM79
Application	Factory, Warehouse, Airports, Railways.

WALL WASHER


MODEL NO :- EL-WW1-XXW

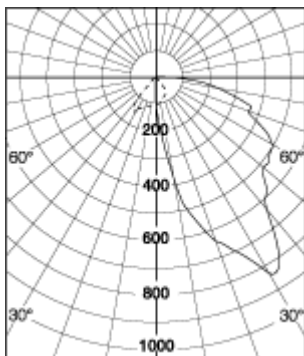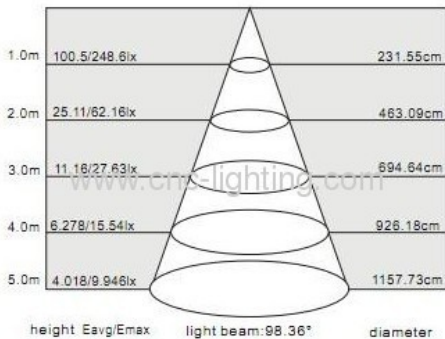

DESCRIPTION	SPECIFICATIONS
LED Make	Osram
LED Type	SMD, High Power
Power	9W-48W
Input	90-285VAC,50Hz
Color Temperature	2700K-6500K, RGB
Working Temp.	-20 to +50 C
Power Factor	>.95
Driver Efficiency	> 85%
Lumen Efficiency	100 Lumen/Watt
Luminaries Material	Aluminium Die Casting
Ingress Protection	IP67
Working Life	> 50,000 Hours
LED Operating Current	600-650mA
CRI	>80
Overload Protection	95-110%, 4KV Surge Protection
Distribution	60Deg-150Deg
Certificates	LM80,L70
Application	Streets, Stadiums, Compounds, Housing Soc.

INGROUND LIGHT

MODEL NO :- EL-IG1-XXW



DESCRIPTION	SPECIFICATIONS
LED Make	Osram
LED Type	SMD, High/Low Power
Power	1W-15W
Input	90-285VAC,50Hz
Color Temperature	2700K-6500K, RGB
Working Temp.	-20 to +50 C
Power Factor	>.95
Driver Efficiency	> 85%
Lumen Efficiency	100 Lumen/Watt
Luminaries Material	Aluminium Die Casting
Ingress Protection	IP68
Working Life	> 50,000 Hours
LED Operating Current	600-650mA
CRI	>80
Overload Protection	95-110%, 4KV Surge Protection
Distribution	60Deg-150Deg
Certificates	LM80,L70
Application	Fountains, Waterfalls, swimming pool

STAIRCASE LIGHT

MODEL NO :- EL-SC1-XXW



DESCRIPTION	SPECIFICATIONS
LED Make	Osram
LED Type	SMD, High/Low Power
Power	1W-6W
Input	90-285VAC,50Hz
Color Temperature	2700K-6500K,
Working Temp.	-20 to +50 C
Power Factor	>.95
Driver Efficiency	> 85%
Lumen Efficiency	80 Lumen/Watt
Luminaries Material	Aluminium Die Casting
Ingress Protection	IP68
Working Life	> 50,000 Hours
LED Operating Current	100-650mA
CRI	>80
Overload Protection	95-110%,
Distribution	60Deg-150Deg
Certificates	LM80,L70
Application	Stairs, Offices, Residence, Hotels

UNDERWATER LIGHT

MODEL NO :- EL-UW1-XXW



DESCRIPTION	SPECIFICATIONS
LED Make	Osram
LED Type	SMD, High/Low Power
Power	1W-15W
Input	90-285VAC,50Hz
Color Temperature	2700K-6500K, RGB
Working Temp.	-20 to +50 C
Power Factor	>.95
Driver Efficiency	> 85%
Lumen Efficiency	100 Lumen/Watt
Luminaries Material	Aluminium Die Casting
Ingress Protection	IP68
Working Life	> 50,000 Hours
LED Operating Current	600-650mA
CRI	>80
Overload Protection	95-110%, 4KV Surge Protection
Distribution	60Deg-150Deg
Certificates	LM80,L70
Application	Fountains, Waterfalls, swimming pool