



PANEL LIGHT

MODEL NO :- EL-PL1-XXW-SQ

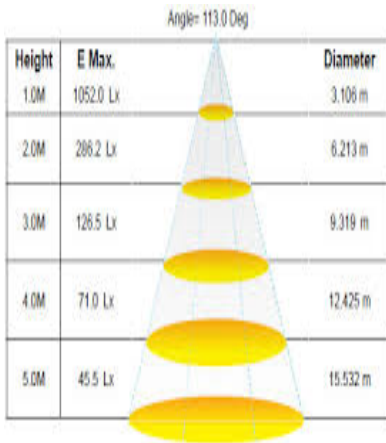


| DESCRIPTION | SPECIFICATIONS |
|-----------------------|----------------------------|
| LED Make | Osram/Samsung |
| LED Type | SMD, Low Power |
| Power | 8W/12W/15W/18W/22W |
| Input | 90-285VAC,50Hz |
| Color Temperature | 2700K-6500K |
| Working Temp. | -20 to +50 C |
| Power Factor | >.95 |
| Driver Efficiency | > 85% |
| Lumen Efficiency | 100 Lumen/Watt |
| Luminaries Material | Aluminium Die Casting |
| Ingress Protection | IP40 |
| Working Life | > 50,000 Hours |
| LED Operating Current | 55-60mA |
| CRI | >80 |
| Overload Protection | 95-110% |
| Distribution | Diffused |
| Certificates | LM80,L70 |
| Application | Residential, Office, Lobby |

LUMINOUS INTENSITY DISTRIBUTION




LUMINOUS INTENSITY DISTRIBUTION

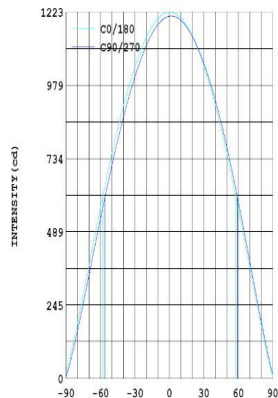


PANEL LIGHT

MODEL NO :- EL-PL1-XXW-RO

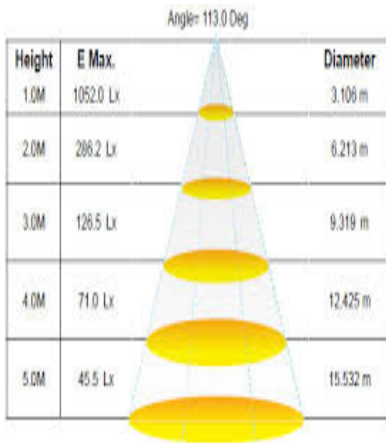

| DESCRIPTION | SPECIFICATIONS |
|------------------------------|----------------------------|
| LED Make | Osram/Samsung |
| LED Type | SMD, Low Power |
| Power | 8W/12W/15W/18W/22W |
| Input | 90-285VAC,50Hz |
| Color Temperature | 2700K-6500K |
| Working Temp. | -20 to +50 C |
| Power Factor | >.95 |
| Driver Efficiency | > 85% |
| Lumen Efficiency | 100 Lumen/Watt |
| Luminaries Material | Aluminium Die Casting |
| Ingress Protection | IP40 |
| Working Life | > 50,000 Hours |
| LED Operating Current | 55-60mA |
| CRI | >80 |
| Overload Protection | 95-110% |
| Distribution | Diffused |
| Certificates | LM80,L70 |
| Application | Residential, Office, Lobby |

LUMINOUS INTENSITY DISTRIBUTION



LUMINOUS INTENSITY DISTRIBUTION

